

PIVOT-STAR

C81 Series 160° Anyway Snap-on Speed Adjustable Soft-close Hinges with Spiral-cam




PRODUCT



DESCRIPTION


- Opening angle: 160°
- Depth of hinge cup: 12.4mm
- Diameter of hinge cup: 35mm
- Range of door thickness: 18-28mm
- Possible drilling distance on the door(K): 3-6mm

APPLICATION

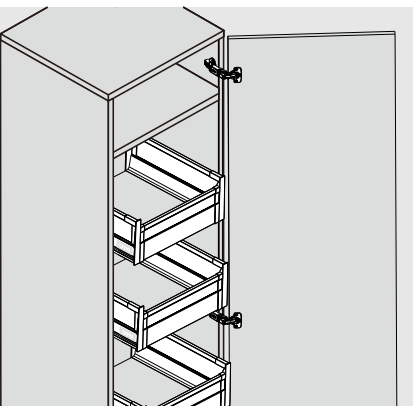


PLANNING

Space needed to open the door




	T=	18	19	20	21	22	23	24	25	26	27	28
K=3	A=	0	0	0	0	0	0	0	0	0	0	0
K=4	A=	0	0	0	0	0	0	0	0	0	0	0
K=5	A=	0	0	0	0	0	0	0	0	0	0	0
K=6	A=	0	0	0	0	0	0	0	0	0	0	0

ORDER INFORMATION

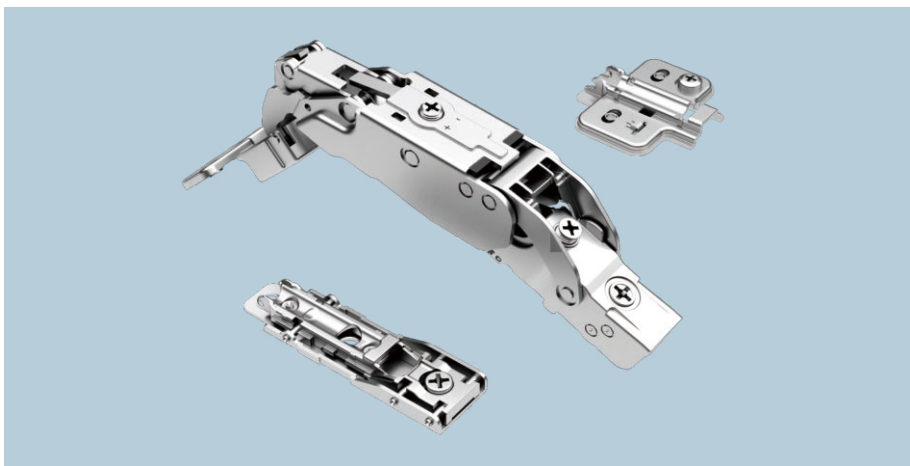

Ø35mm Hinge cup types



Use these formulas to determine the type of hinge arm, the drilling distance "K" and the height of the mounting plate "H" for each door application.




Nickel plated(A01)

Titanium black(A08)

Application

The door combined with a mounting plate H=0, opens at 90°, with a 1.3mm protrusion allowing objects(e.g. drawers) to move from inside of the cabinet.

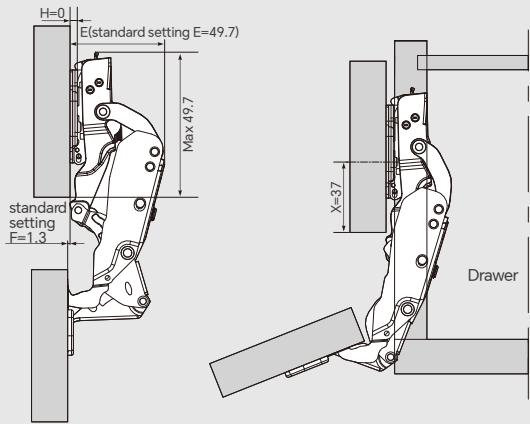


Door Type	E(max)	F(90°)
Full Overlay	49.7	1.3
Half Overlay	58.7	-8.3
Inset Door	67.7	-17.3

Full overlay C=0

No gap is required when door thickness is less than 28mm.

A trial assembly is recommended when door thickness is over 28mm.

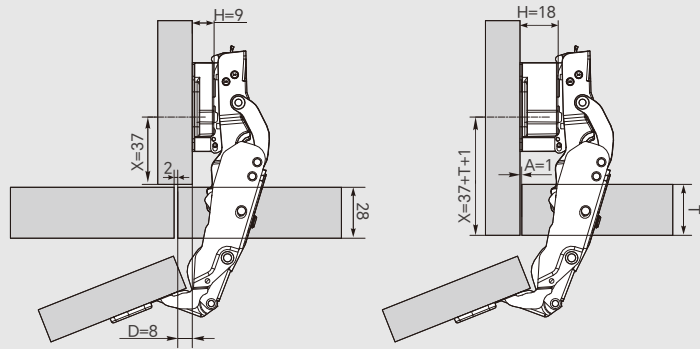

Half overlay C=9


Inset C=18

C81 Series 160° Anyway Snap-on Speed Adjustable Soft-close Hinges with Spiral-cam

Full overlay



Overlay




Half overlay



Inset




H=12+K-(D)



For full overlay, H=0 mounting plate only

	Item No.	Pcs/ctn
Soft-close	C81A805FAB	100
Unsprung	A81A805A	100


H=12+K-(D)



For overlay, H=4 mounting plate only

	Item No.	Pcs/ctn
Soft-close	C81A805FAB	100
Unsprung	A81A805A	100


H=12+K-(D)



For half overlay, H=9 mounting plate only

	Item No.	Pcs/ctn
Soft-close	C81A805FAB	100
Unsprung	A81A805A	100

H=12+K+(A)



For inset door, H=18 mounting plate only

	Item No.	Pcs/ctn
Soft-close	C81A805FAB	100
Unsprung	A81A805A	100

ASSEMBLY AND ADJUSTMENT


PIVOT-STAR Hinges Installation and Parameters



DTC

PLANNING


Application with full overlay door

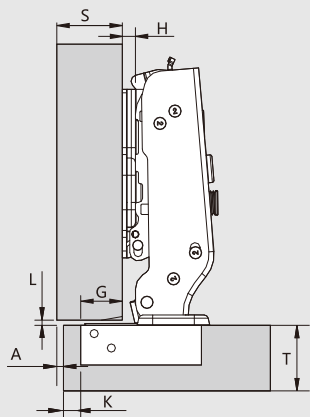

S = Thickness of the cabinet side
D = Required door overlay
T = Door thickness
K = Drilling distance
A = Reveal
L = Gap between door and cabinet
H = Height of mounting plate
G = Hinge constant

Whatever door overlay is required, you can select from our range the combination of both the type of hinge arm and the thickness of mounting plate necessary to solve your construction problems and avoid the need to stock too many different components.


Application with half overlay door

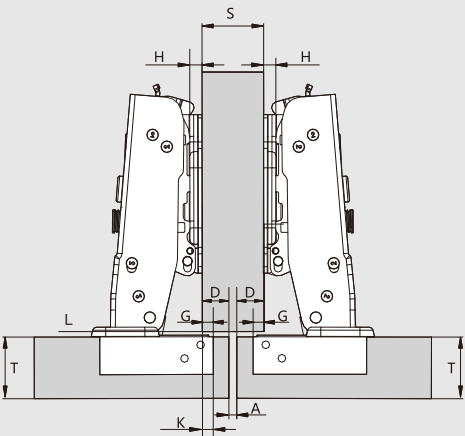

S = Thickness of the cabinet side
D = Required door overlay
T = Door thickness
K = Drilling distance
A = Reveal
L = Gap between door and cabinet
H = Height of mounting plate
G = Hinge constant

Whatever door overlay is required, you can select from our range the combination of both the type of hinge arm and the thickness of mounting plate necessary to solve your construction problems and avoid the need to stock too many different components.

Application with inset door

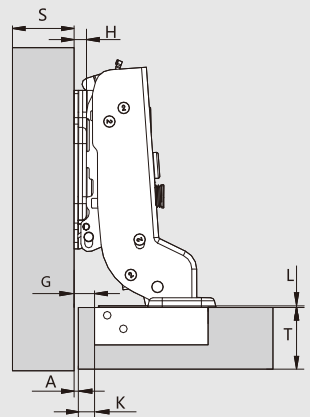


S = Thickness of the cabinet side
T = Door thickness
K = Drilling distance
A = Reveal
L = Gap between internal face of door and internal cabinet elements (e.g. shelves, drawer, etc.)
H = Height of mounting plate
G = Hinge constant


Whatever door overlay is required, you can select from our range the combination of both the type of hinge arm and the thickness of mounting plate necessary to solve your construction problems and avoid the need to stock too many different components.

PLANNING

Simulation of the opening movement of a 110° hinge with full overlay door

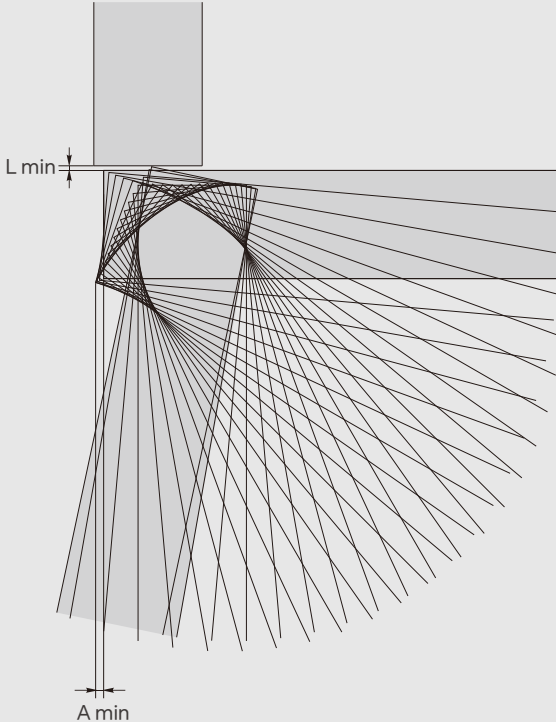

Simulation of the opening movement of a 110° hinge with half overlay door

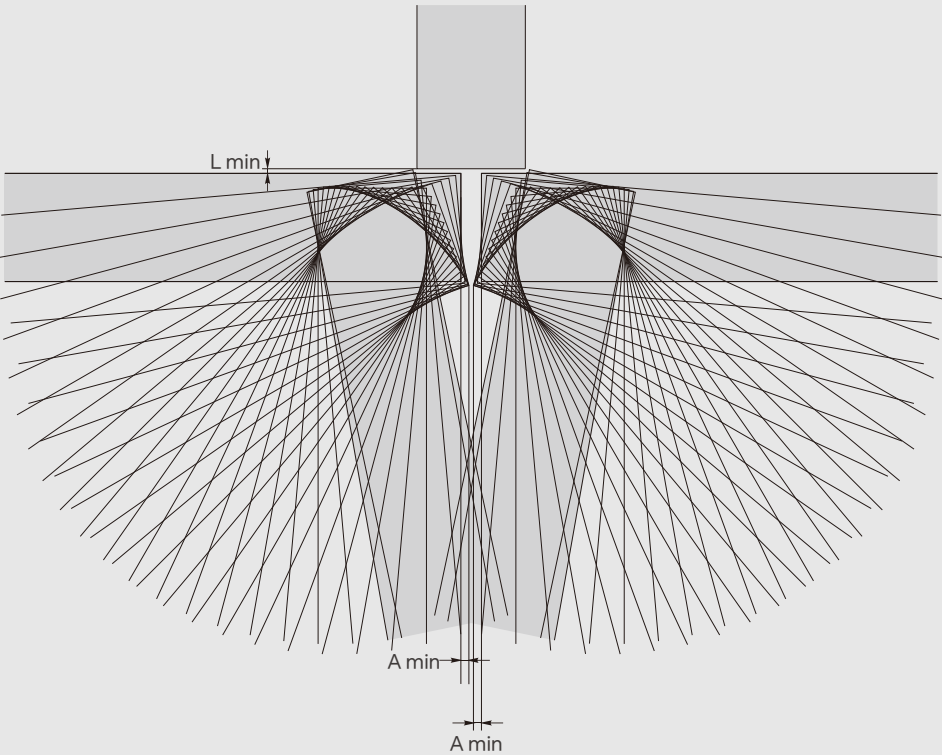

ASSEMBLY AND ADJUSTMENT

PIVOT-STAR Hinges Installation and Parameters




DTC

PLANNING


Side adjustment

Side adjustment of the door is made by using the indicated screw

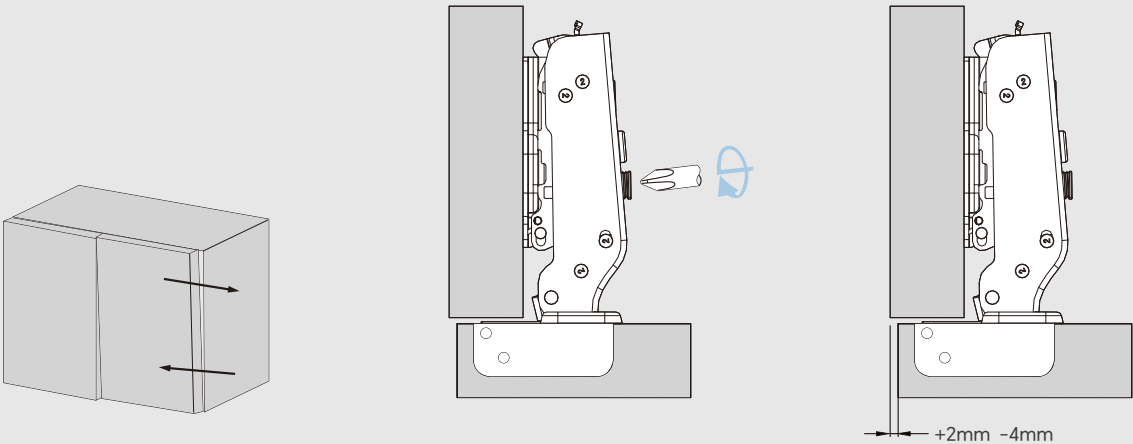


Depth adjustment

Depth adjustment is made without loosening any screw. The door can be moved in or out by rotating the adjustment screw on the hinge arm.

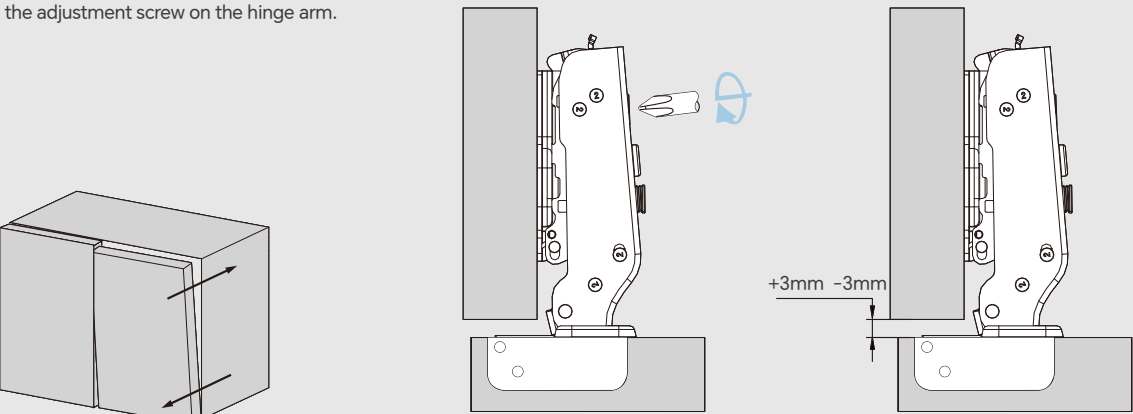

Height adjustment


Height adjustment is made without loosening any screw. The door can be moved up or down by rotating the adjustment screw on the mounting plate.

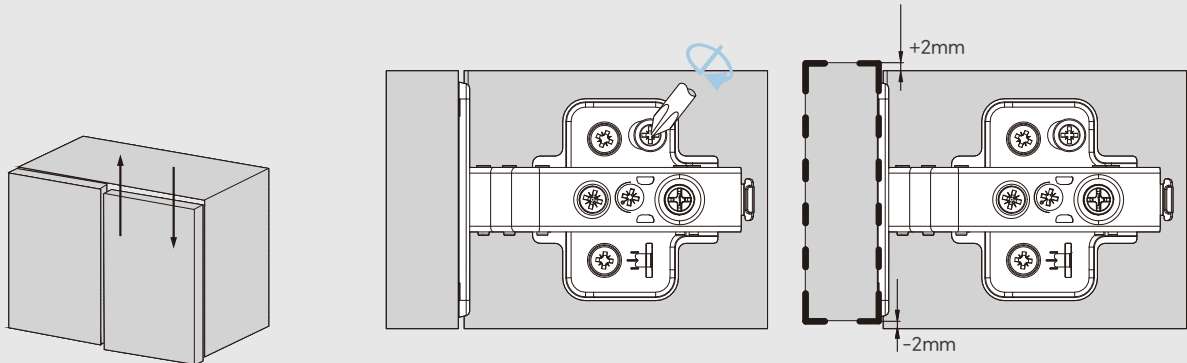



PLANNING



Door closing speed adjustment

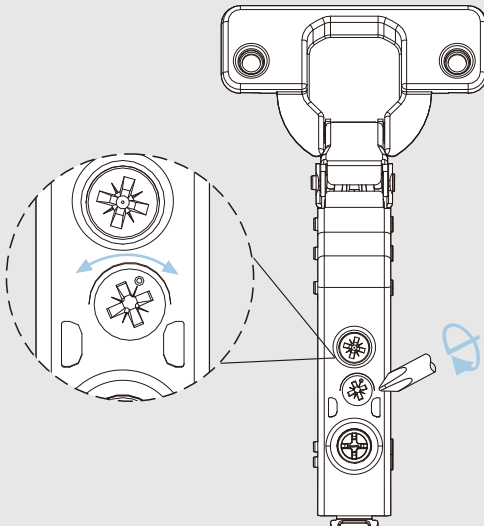

Clockwise increasing door closing time
Counter clockwise reducing door closing time

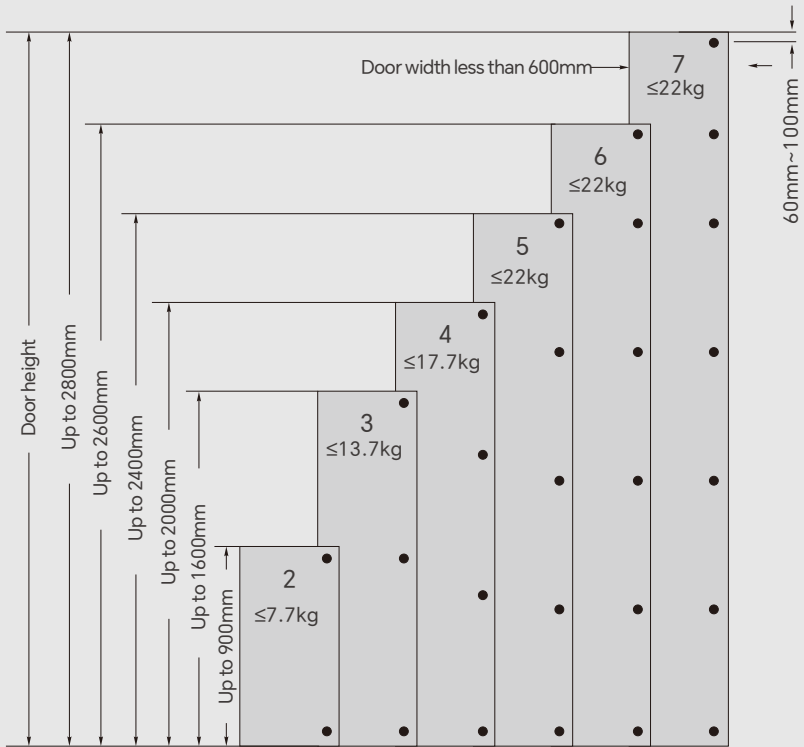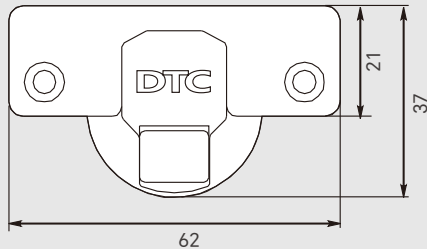

L=distance between hinges, performance is best when L is as far apart as possible

Hinges needed per door
The number of hinges needed depends on three factors: Height, Width and Weight of the door. This illustration can be used as a general guide, however a trial is suggested for doors made of heavier materials. Performance is best when distance (L) is as far apart as possible on doors with two hinges. This is especially important for doors that are wider than they are tall to prevent door sag.

Adjustment

Side adjustment: -4mm~+2mm
Depth adjustment: ±3mm
Height adjustment: ±2mm

Mounting plates

Two-hole or four-hole mounting plates
Standard and in-line cam-adjustable mounting plates